




Specification Features

- Introducing NLS Impact Bollard with TG Core-In Protection System (impact rated core with sleeve) which has been ASTM F3016 full scale crash tested at an accredited test center; the 6" version offers a S10 impact rating (rated to stop a 5,000 lb vehicle up to 10 mph), while the 8" version comes with an impressive S20 impact rating (rated to stop a 5,000 lb vehicle up to 20 mph)
- Blends beautifully into any storefront or pathway environment where protection from traffic intrusion is required: Corporate, Schools, Hospitals, Airports, Hotels, Retail, Municipalities, and Industrial Settings
- 945 Lumens to 2,975 Lumens with reduced glare and improved uniformity
- T5 distribution for the Cut Off Grill, Stacked Louver, and Paraline Reflector options
- 16L LED configurations with an unlit option
- Amber, 2700K, 3000K, 3500K (80 CRI only), 4000K, and 5000K CCT multichip high power 70 and 80 CRI LEDs
- 20kA Surge Protection (120V - 480V), 0-10V programmable, dimming LED drivers
- 8 standard finishes, marine grade finish and custom finish available
- Controls agnostic, compatible with most control systems and sensors
- Aluminum Housing with flushed, recessed and no visible hardware
- Environmentally Friendly Product which reduces energy consumption, L70 > 100,000 hours
- Buy America(n) option compliant
- Cost competitive, supply chain friendly, and short shipping Lead Times in days & weeks

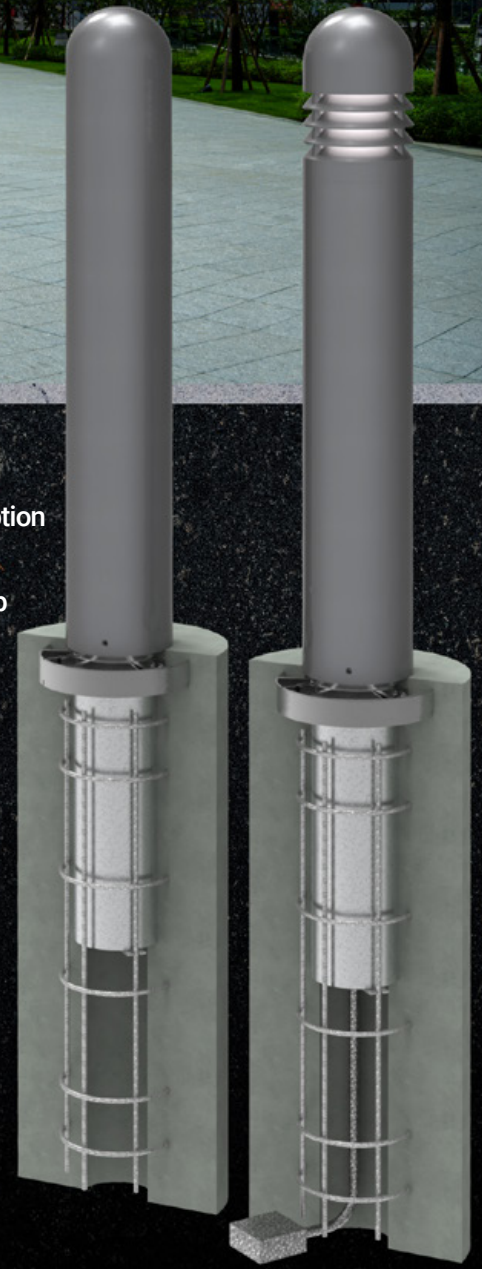

FIXTURES & POLES | BUY AMERICA(N) | QUICKSHIP FLASH

