

CEILING MOUNTED LIGHTING

FORM AND FUNCTION

- Sleek, low profile housing
- Economy performance
- Engineered for optimum thermal management
- Low depreciation rate
- Reduces energy consumption and costs up to 65%
- Optical system designed for Parking Structures

CONSTRUCTION

- Spun Aluminum
- Corrosion resistant external hardware
- One-piece silicone gasket ensures IP65 seal for electronics compartment
- Two-piece silicone Micro Optic system ensures IP67 level seal around each PCB

BUY AMERICAN

To ensure the latest BAA/TAA/BABA Standards are being met, please select BAA, TAA, or BABA in the options section. Please contact the factory before placing an order for any NLS products requesting BAA (Buy American Act), TAA (Trade American Act), or BABA (Build America, Buy America).



LED WATTAGE CHART

	16L	32L
400 milliamps	21w	-
530 milliamps	28w	-
700 milliamps	36w	71w
1050 milliamps	56w	106w

Project Name: _____ Type: _____

--	--	--	--	--	--	--	--	--

Cat#	Light Dist.	# of LEDs	Milliamps	Kelvin	Volts	Mounting	Color	Options
Value Series Round Small (VSR-S)	Type 2 (T2)	16 (16L)	400 (40) ¹	Amber 585-600nm (AMBER) ⁵ ⁶	120-277 (UNV)	Pendant Mount 12" Length (PM12)	Bronze Textured (BRZ)	Marine Grade Finish (MGF)
	Type 3 (T3)	32 (32L)	530 (53) ¹	2700K, 70 CRI (27K7) ⁵	347-480 (HV)	Pendant Mount 24" Length (PM24)	White Textured (WHT)	FSP-211 with Motion Sensor (FSP-8) ⁷ 8'+ Below (FSP-20) ⁷ 9'-20' Heights
	Type 4 (T4)		700 (7)	2700K, 80 CRI (27K8) ² ⁵		Pendant Mount 36" Length (PM36)	Smooth White Gloss (SWT)	Emergency Battery Back-Up (EB)
	Type 5 (T5)		1050 (1)	3000K, 70 CRI (30K7) ⁵		Pendant Mount Custom Length (PMX) ⁴	Silver (SVR)	Dual Feed Load Control Bypass Relay (LCBR) ⁸
				3000K, 80 CRI (30K8) ² ⁵			Black Textured (BLK)	Buy American (BAA) ⁹
			3500K, 80 CRI (35K8)				Smooth Black Gloss (SBK)	Trade American (TAA) ⁹
			4000K, 70 CRI (40K7)				Graphite Textured (GPH)	Build America Buy American (BABA) ⁹
			4000K, 80 CRI (40K8) ²				Grey Textured (GRY)	Custom Controls Integration (CCI) ⁷
			5000K, 70 CRI (50K7)				Custom (CS)	
			5000K, 80 CRI (50K8) ²					

Notes:

- ¹ 16L Only
- ² Consult Factory for Lead Time. Consult Factory for 90 CRI Requests.
- ³ Universal Voltage 120-277
- ⁴ Between 12"-36" Consult Factory
- ⁵ 3000K or lower must be selected to meet International Dark Sky Association certification
- ⁶ Consult Factory
- ⁷ Please contact Factory for Custom Control Integration requests (nLight, NX, WaveLinx, Crestron, DMX/RDM, Synapse, Casambi, Dali II, Avi-On, or other control systems)
- ⁸ Turtle Safe
- ⁹ Consult factory for all BAA/TAA/BABA requests

PRODUCT SPECIFICATIONS

ELECTRICAL

- 120-277 Volts (UNV) or 347-480 Volts (HV)
- 0-10V dimming driver
- Driver power factor at maximum load is $\geq .95$, THD maximum load is 15%
- Led Drivers Ambient Temp. Min (degC) is -40c and Ambient Temp. Max (degC) ranges from 50c to 55c and in some cases, even higher. Consult factory for revalidation by providing fixture catalog string before quoting and specifying it.
- All internal wiring UL certified for 600 VAC and 105°C
- All drivers, controls, and sensors housed in enclosed IP-65 compartment
- CRI 70, 80 or 90
- Color temperatures: Amber, 2700K, 3000K, 3500K, 4000K, 5000K
- Surge Protection: 20KA supplies as standard.

OPTIONS

- **MARINE GRADE FINISH (MGF)** A multi-step process creating protective finishing coat against harsh environments.
 - Chemically washed in a 5 stage cleaning system.
 - Pre-baked
 - Powder coated 3-5 mils of Zinc Rich Super Durable Polyester Primer.
 - Oven Baked.
 - Finished Powder Coating of Super Durable Polyester Powder Coat 3-5 mil thickness.
- **EMERGENCY BATTERY BACK-UP (EB)**
 - 100-277 VAC \pm 10%, 50/60 Hz Input Voltage
 - 43mA Max. Input Current
 - 2.82W Max. Input Power
 - 24-48 Hours Recharge Time
 - Battery Type NiCd 9.6VDC or LiFePO4 9.6VDC
 - 90 Minutes Min. Illumination Time
 - 20W Total Max. LED Powered
 - Class 2 Output Classification


CONTROLS

- **FSP-211 (FSP-X)** Passive infrared (PIR) sensor providing multi-level control based on motion/daylight contribution.
 - All control parameters adjustable via wireless configuration remote storing and transmitting sensor profiles.
 - FSP-8 mounting heights 8 feet and below.
 - FSP-20 mounting heights 9' feet to 20'.
 - Includes 5 dimming event cycles, 0-10V dimming with motion sensing, re-programmable in the field.
 - FSIR-100 commissioning remote is required to change sensor settings. Please contact factory for ordering.
- Controls Agnostic: Please contact factory for your preferred controls option. (nLight, NX, WaveLinx, Crestron, DMX/RDM, Synapse, Casambi, DALI II, Avi-On, or other control systems)

OPTICS

Silicone optics high photo-thermal stability and light output provides higher powered LEDs with minimized lumen depreciation LED life. UV and thermal stability with scratch resistance increases exterior application durability.

- IES Types

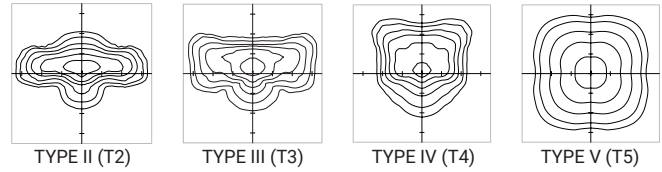

FINISH

- 5 mils electrostatic powder coat.
- NLS' standard high-quality finishes prevent corrosion protects against extreme environmental conditions

WARRANTY

Five-year limited warranty for drivers and LEDs.

LISTINGS

- Certified to UL 1598
- CSA C22.2 No. 250.0
- IP65 / IP67 Rated

BUY AMERICAN OPTION

While all of the NLS Lighting products listed in this document qualify for the Buy America(n) Act of 1933, we reserve the right to change our listings without notice.

The information provided above is for general informational purposes only. We encourage you to consult legal professionals for advice particular to your projects concerning BAA, TAA, BABA or Buy America.

Additional NLS Products that meet BAA, TAA standards can be found at the following link:

[https://nslighting.com/wp-content/uploads/cs/NLS_BuyAmerica\(n\).pdf](https://nslighting.com/wp-content/uploads/cs/NLS_BuyAmerica(n).pdf)



The information and specifications on this document are subject to change without any notification. All values are design, nominal, or typical or prorated values when measured under internal and external laboratory conditions.



701 Kingshill Place, Carson, CA 90746
Call Us Today (310) 341-2037

nslighting.com


PRODUCT SPECIFICATIONS

LUMENS									
PART NUMBER	T2 LUMENS	T2 LM/W	T3 LUMENS	T3 LM/W	T4 LUMENS	T4 LM/W	T5 LUMENS	T5 LM/W	WATTS
VSR-S-16L-40-27K7	2305	110	2247	107	2227	106	2324	111	21
VSR-S-16L-40-27K8	2158	103	2104	100	2085	99	2176	104	21
VSR-S-16L-40-30K8	2314	110	2256	107	2236	106	2333	111	21
VSR-S-16L-40-30K7	2492	119	2429	116	2408	115	2513	120	21
VSR-S-16L-40-35K8	2314	110	2256	107	2236	106	2333	111	21
VSR-S-16L-40-40K8	2492	119	2429	116	2408	115	2513	120	21
VSR-S-16L-40-40K7	2693	128	2625	125	2602	124	2715	129	21
VSR-S-16L-40-50K8	2492	119	2429	116	2408	115	2513	120	21
VSR-S-16L-40-50K7	2693	128	2625	125	2602	124	2715	129	21
VSR-S-16L-53-30K7	3275	117	3155	114	3165	113	3302	118	28
VSR-S-16L-53-40K7	3524	126	3435	123	3406	122	3553	127	28
VSR-S-16L-53-50K7	3603	129	3511	125	3482	124	3633	130	28
VSR-S-16L-7-30K7	4100	114	4115	111	4003	111	4177	116	36
VSR-S-16L-7-40K7	4411	123	4300	119	4308	120	4495	125	36
VSR-S-16L-7-50K7	4510	125	4396	122	4404	122	4595	128	36
VSR-S-16L-1-30K7	5858	105	5606	102	5661	101	5907	105	56
VSR-S-16L-1-40K7	6303	113	6146	110	6091	109	6356	113	56
VSR-S-16L-1-50K7	6443	115	6283	112	6227	111	6497	116	56
VSR-S-32L-7-30K7	8086	114	7881	111	7896	111	8239	116	71
VSR-S-32L-7-40K7	8700	123	8480	119	8496	120	8865	125	71
VSR-S-32L-7-50K7	8894	125	8669	122	8685	122	9063	128	71
VSR-S-32L-1-30K7	11088	105	10812	102	10715	101	11181	105	106
VSR-S-32L-1-40K7	11930	113	11634	110	11529	109	12030	113	106
VSR-S-32L-1-50K7	12196	115	11893	112	11787	111	12299	116	106


EMERGENCY OPERATION LUMENS									
PART NUMBER	T2 LUMENS	T2 LM/W	T3 LUMENS	T3 LM/W	T4 LUMENS	T4 LM/W	T5 LUMENS	T5 LM/W	WATTS
VSR-X-16L-35-30K7	2231	119	2188	116	2154	115	2255	120	18
VSR-X-16L-35-40K7	2305	128	2247	125	2227	124	2324	129	18
VSR-X-16L-35-50K7	2356	131	2297	128	2277	127	2376	132	18

LUMEN MAINTENANCE DATA							
Ambient Temperature	Drive Current	L90 Hours*	L70 Hours**	30,000 Hours*	50,000 Hours*	60,000 Hours*	100,000 Hours**
25°C	Up to 700mA	58,000	173,000	95.7%	91.6%	89.6%	82.1%
	1050mA	48,000	143,000	94.3%	89.5%	87.2%	78.5%
*Reported extrapolations per IESNA TM-21				**Projected extrapolations per IESNA TM-21			


LED KELVIN RANGE




AMBER
585-600 nm




2700K 70 CRI




3000K 70 CRI



3500K 80 CRI



4000K 70 CRI



5000K 70 CRI



Color	Dominant or Peak Wavelength Range (nm)	
	Minimum	Maximum
Amber	585	600

PRODUCT SPECIFICATIONS

DIMENSION	VSR-S
A	14 in.
B	4.83 in.
C	4 in.
Weight	9lbs



EPA	SGL 12"	SGL 24"	SGL 36"
VSR-S-PM	0.66	0.73	0.8

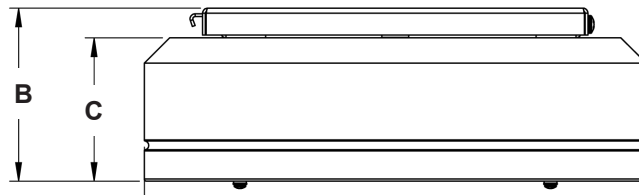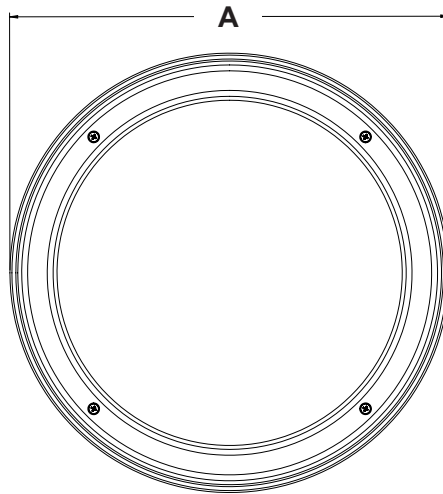


PRODUCT SPECIFICATIONS

PENDANT MOUNT (PMX)

Available lengths:


- 12" length (PM12)
- 24" Length (PM24)
- 36" Length (PM36)
- Custom Length (PMX)

**Consult factory for custom lengths*

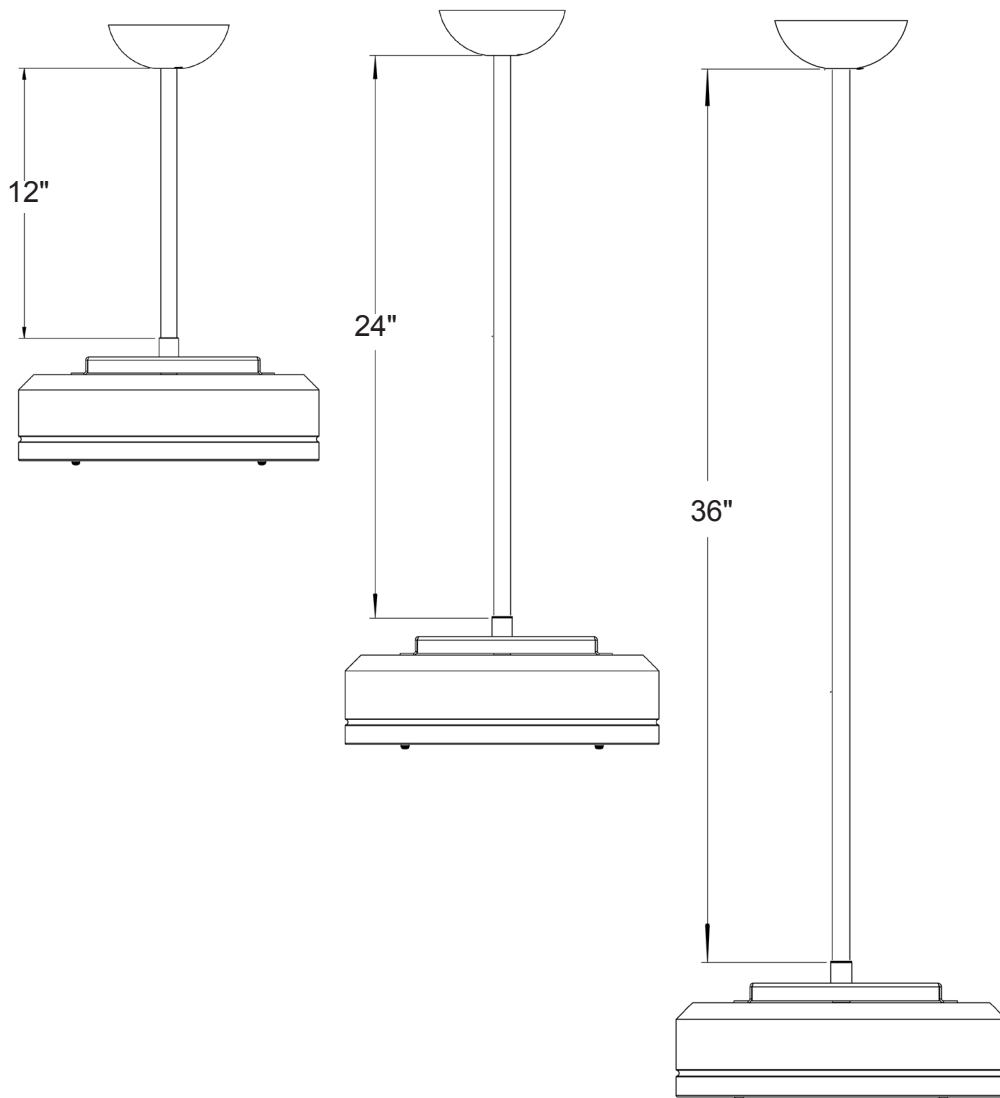


PRODUCT SPECIFICATIONS

OPTICAL CONFIGURATIONS




VSR-S / 16L



VSR-S / 32L

EMERGENCY BATTERY BACK-UP (EB)



FSP-211

