

# NV-F

The Ultimate Flood



## NV-F1

**FORM  
FUNCTION  
RELIABILITY  
DESIGN  
PERFORMANCE**

Sleek, low-profile, die-cast housing, spec grade performance and L70 of 173,000 hours. The NV-F is in a class of its own.

- 8 - Silicone Micro Optics  
Flood Distributions 15°, 30°, 55°, 85°  
IES Distributions T2, T3, T4, T5
- 5 - Kelvin Temperatures  
2700, 3000, 3500, 4000, and 5000
- 4 - Vibrant Static Color LEDs  
Red (624-634nm)  
Green (520-540nm)  
Blue (440-460nm)  
PC Amber (585-600nm)
- 15 - Mounting Brackets & Accessories
- 6 - Glare Control options
- Marine Grade Finish as Standard
- 16L LED Configuration
- CRI 70, 80
- Die-Cast Housing and Heat Sink
- 0-10v Dimming Driver





Barn Doors (BAD)



Egg Crate Louver (ECL)



Angled Visor (AGV)







Snoot Long (SNL)



Snoot Short (SNS)



House Side Shield (HSS)

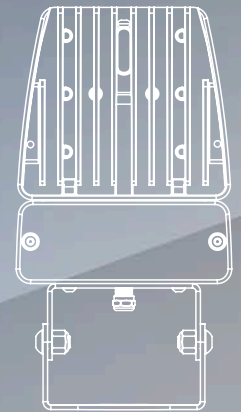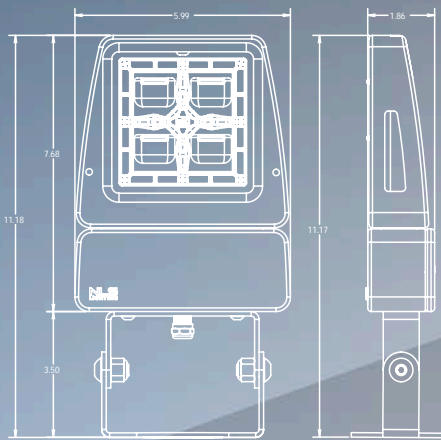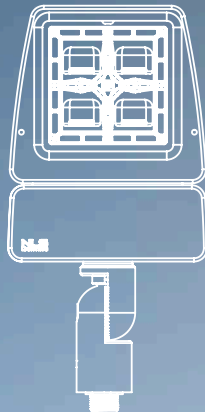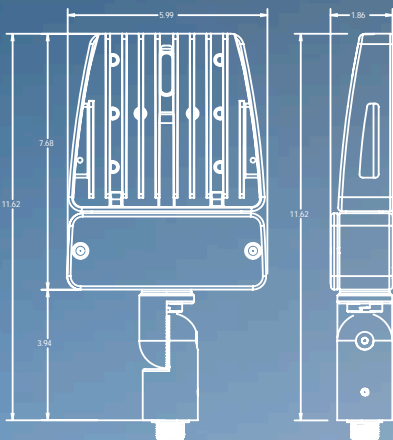

NLS LIGHTING, LLC

701 Kingshill Place, Carson, CA 90746

(310) 341-2037 | nlsighting.com

# **NV-F**

The Ultimate Flood

## **NV-F2**

**FORM  
FUNCTION  
RELIABILITY  
DESIGN  
PERFORMANCE**

Sleek, low-profile, die-cast housing, spec grade performance and L70 of 173,000 hours. The NV-F is in a class of its own.

- 8 - Silicone Micro Optics  
Flood Distributions 15°, 30°, 55°, 85°  
IES Distributions T2, T3, T4, T5
- 5 - Kelvin Temperatures  
2700, 3000, 3500, 4000, and 5000
- 4 - Vibrant Static Color LEDs  
Red (624-634nm)  
Green (520-540nm)  
Blue (440-460nm)  
PC Amber (585-600nm)
- 15 - Mounting Brackets & Accessories
- 6 - Glare Control options
- Marine Grade Finish as Standard
- 32L LED Configuration
- CRI 70, 80
- Die-Cast Housing and Heat Sink
- 0-10v Dimming Driver





Barn Doors (BAD)



Egg Crate Louver (ECL)



Angled Visor (AGV)




Snoot Long (SNL)



Snoot Short (SNS)



House Side Shield (HSS)

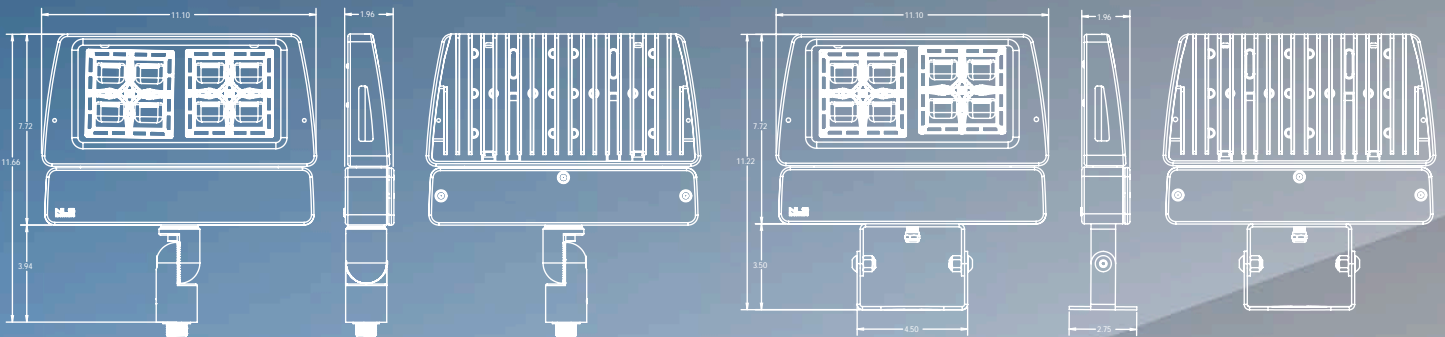

NLS LIGHTING, LLC  
701 Kingshill Place, Carson, CA 90746  
(310) 341-2037 | [nlsighting.com](http://nlsighting.com)