

NLS
LIGHTING

TRAC - 5

TRAC
COLLECTION

FORM - FUNCTION - RELIABILITY

- Elegant Rectilinear Extruded Aluminum Housing
- Silicone Micro Optics
- IES Distributions T2, T3, T4, T5
- L70 173,000 Hours
- 0-10V Dimming Drivers
- 2700, 3000, 3500, 4000, or 5000 Kelvin
- 3,600-25,000 Lumens, 18-205 Watts
- Advanced Thermal Management System
- 5 mils Electrostatic Powder Coat
- IP67 Light Engine





MICRO OPTICS

IP67 Rated, Silicone Optic modules designed to withstand extreme weather and thermal conditions, UV, vandal resistant. Rated up to 150° C

HOUSING

Extruded aluminum

SPECIFICATION FEATURES

- **Silicone Micro Optics** - Will not Yellow, Oxidize, become Brittle or Crack. IP67 Protective Light Engine Seal. Fifty Percent More Heat resistant to LED temperature than common PMMA Acrylic or Polycarbonate optics. Vandal Proof!
- **Lighting Solution** - The TRAC Collection has an L70 of 173,000 Hours. It utilizes the best electrical components available including 0-10V Dimming Driver(s), and a robust Thermal Management System
- Extruded, Fabricated, Powder Coated and Assembled in the U.S.A.

TRAC - 4

TRAC
COLLECTION

FORM - FUNCTION - RELIABILITY

- Elegant Rectilinear Extruded Aluminum Housing
- Silicone Micro Optics
- IES Distributions T2, T3, T4, T5
- L70 173,000 Hours
- 0-10V Dimming Drivers
- 2700, 3000, 3500, 4000, or 5000 Kelvin
- 3,600-25,000 Lumens, 18-205 Watts
- Advanced Thermal Management System
- 5 mils Electrostatic Powder Coat
- IP67 Light Engine





HOUSING
Extruded aluminum

MICRO OPTICS
IP67 Rated, Silicone Optic modules designed to withstand extreme weather and thermal conditions, UV, vandal resistant. Rated up to 150° C

SPECIFICATION FEATURES

- **Silicone Micro Optics** - Will not Yellow, Oxidize, become Brittle or Crack. IP67 Protective Light Engine Seal. Fifty Percent More Heat resistant to LED temperature than common PMMA Acrylic or Polycarbonate optics. Vandal Proof!
- **Lighting Solution** - The TRAC Collection has an L70 of 173,000 Hours. It utilizes the best electrical components available including 0-10V Dimming Driver(s), and a robust Thermal Management System
- Extruded, Fabricated, Powder Coated and Assembled in the U.S.A.

NLS
LIGHTING


TRAC - 3

TRAC
COLLECTION

FORM - FUNCTION - RELIABILITY

- Elegant Rectilinear Extruded Aluminum Housing
- Silicone Micro Optics
- IES Distributions T2, T3, T4, T5
- L70 173,000 Hours
- 0-10V Dimming Drivers
- 2700, 3000, 3500, 4000, or 5000 Kelvin
- 3,600-19,000 Lumens, 18-156 Watts
- Advanced Thermal Management System
- 5 mils Electrostatic Powder Coat
- IP67 Light Engine



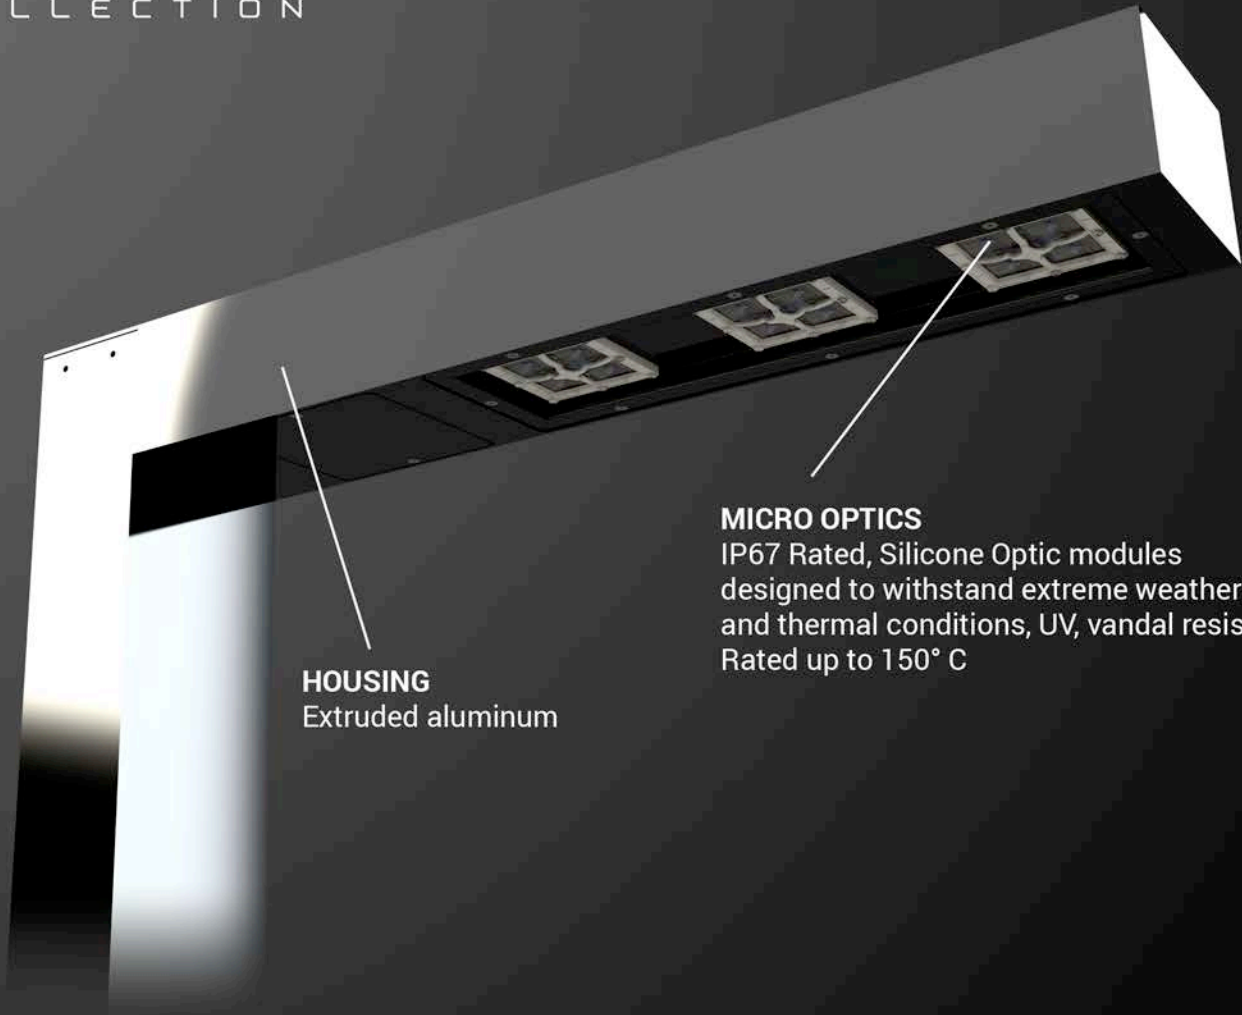

HOUSING
Extruded aluminum

MICRO OPTICS
IP67 Rated, Silicone Optic modules
designed to withstand extreme weather
and thermal conditions, UV, vandal resistant.
Rated up to 150° C

SPECIFICATION FEATURES

- **Silicone Micro Optics** - Will not Yellow, Oxidize, become Brittle or Crack. IP67 Protective Light Engine Seal. Fifty Percent More Heat resistant to LED temperature than common PMMA Acrylic or Polycarbonate optics. Vandal Proof!
- **Lighting Solution** - The TRAC Collection has an L70 of 173,000 Hours. It utilizes the best electrical components available including 0-10V Dimming Driver(s), and a robust Thermal Management System
- Extruded, Fabricated, Powder Coated and Assembled in the U.S.A.

NLS
LIGHTING


TRAC - 2

TRAC
COLLECTION

FORM - FUNCTION - RELIABILITY

- Elegant Rectilinear Extruded Aluminum Housing
- Silicone Micro Optics
- IES Distributions T2, T3, T4, T5
- L70 173,000 Hours
- 0-10V Dimming Drivers
- 2700, 3000, 3500, 4000, or 5000 Kelvin
- 3,600-12,000 Lumens, 18-106 Watts
- Advanced Thermal Management System
- 5 mils Electrostatic Powder Coat
- IP67 Light Engine



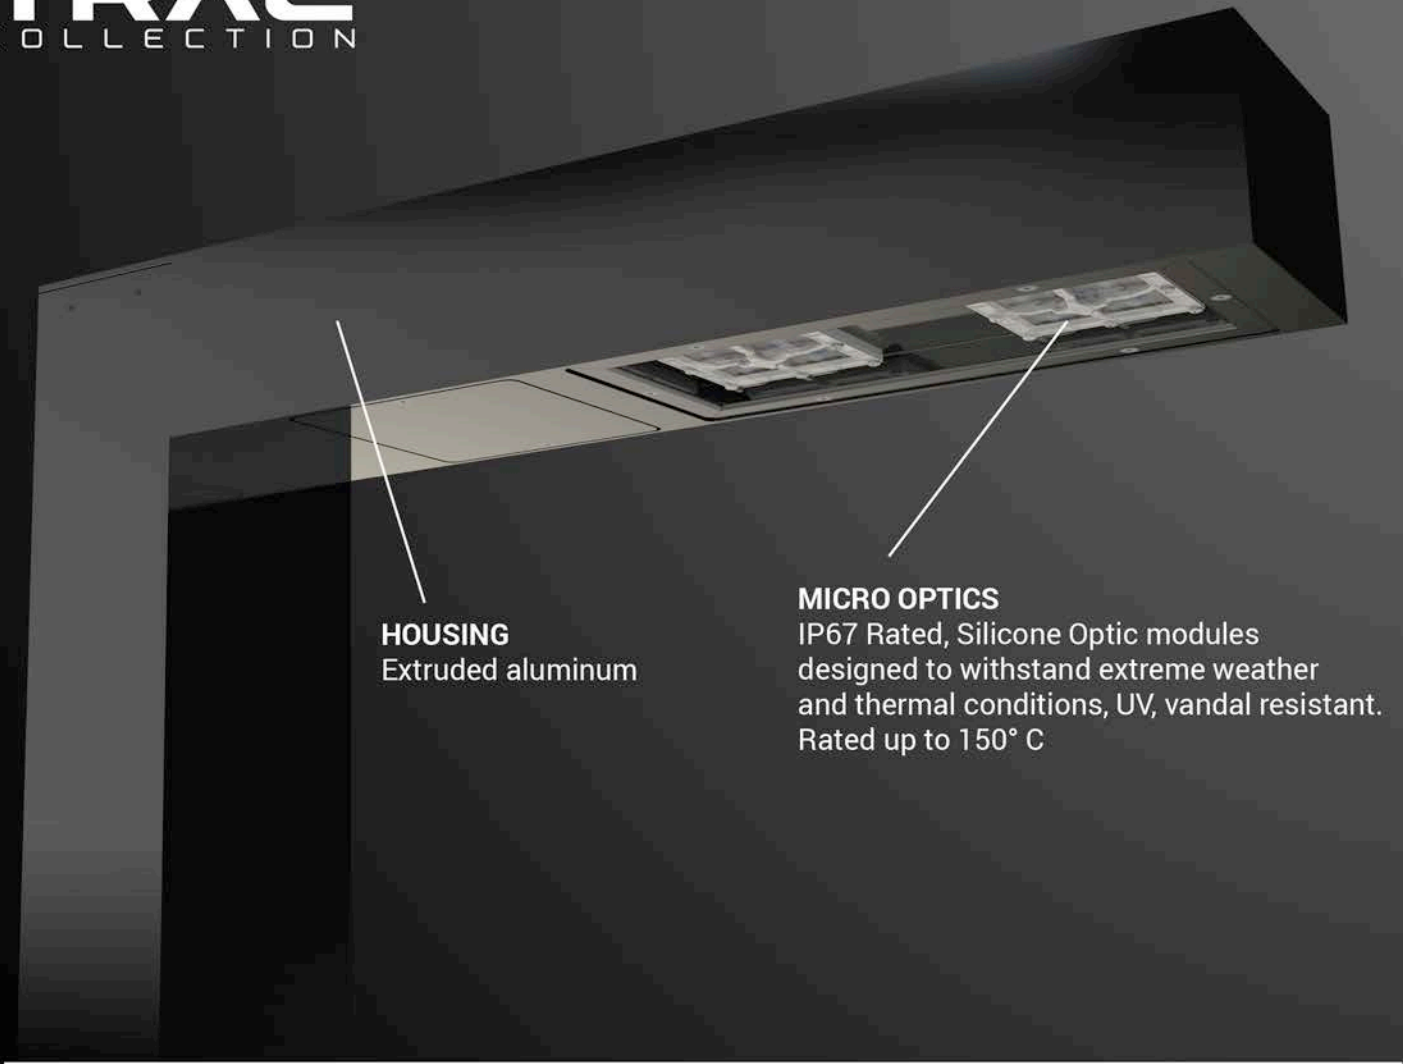

HOUSING
Extruded aluminum

MICRO OPTICS
IP67 Rated, Silicone Optic modules designed to withstand extreme weather and thermal conditions, UV, vandal resistant. Rated up to 150° C

SPECIFICATION FEATURES

- **Silicone Micro Optics** - Will not Yellow, Oxidize, become Brittle or Crack. IP67 Protective Light Engine Seal. Fifty Percent More Heat resistant to LED temperature than common PMMA Acrylic or Polycarbonate optics. Vandal Proof!
- **Lighting Solution** - The TRAC Collection has an L70 of 173,000 Hours. It utilizes the best electrical components available including 0-10V Dimming Driver(s), and a robust Thermal Management System
- Extruded, Fabricated, Powder Coated and Assembled in the U.S.A.

NLS
LIGHTING


TRAC - 1

TRAC
COLLECTION

FORM - FUNCTION - RELIABILITY

- Elegant Rectilinear Extruded Aluminum Housing
- Silicone Micro Optics
- IES Distributions T2, T3, T4, T5
- L70 173,000 Hours
- 0-10V Dimming Drivers
- 2700, 3000, 3500, 4000, or 5000 Kelvin
- 1,900-6,600 Lumens, 18-56 Watts
- Advanced Thermal Management System
- 5 mils Electrostatic Powder Coat
- IP67 Light Engine



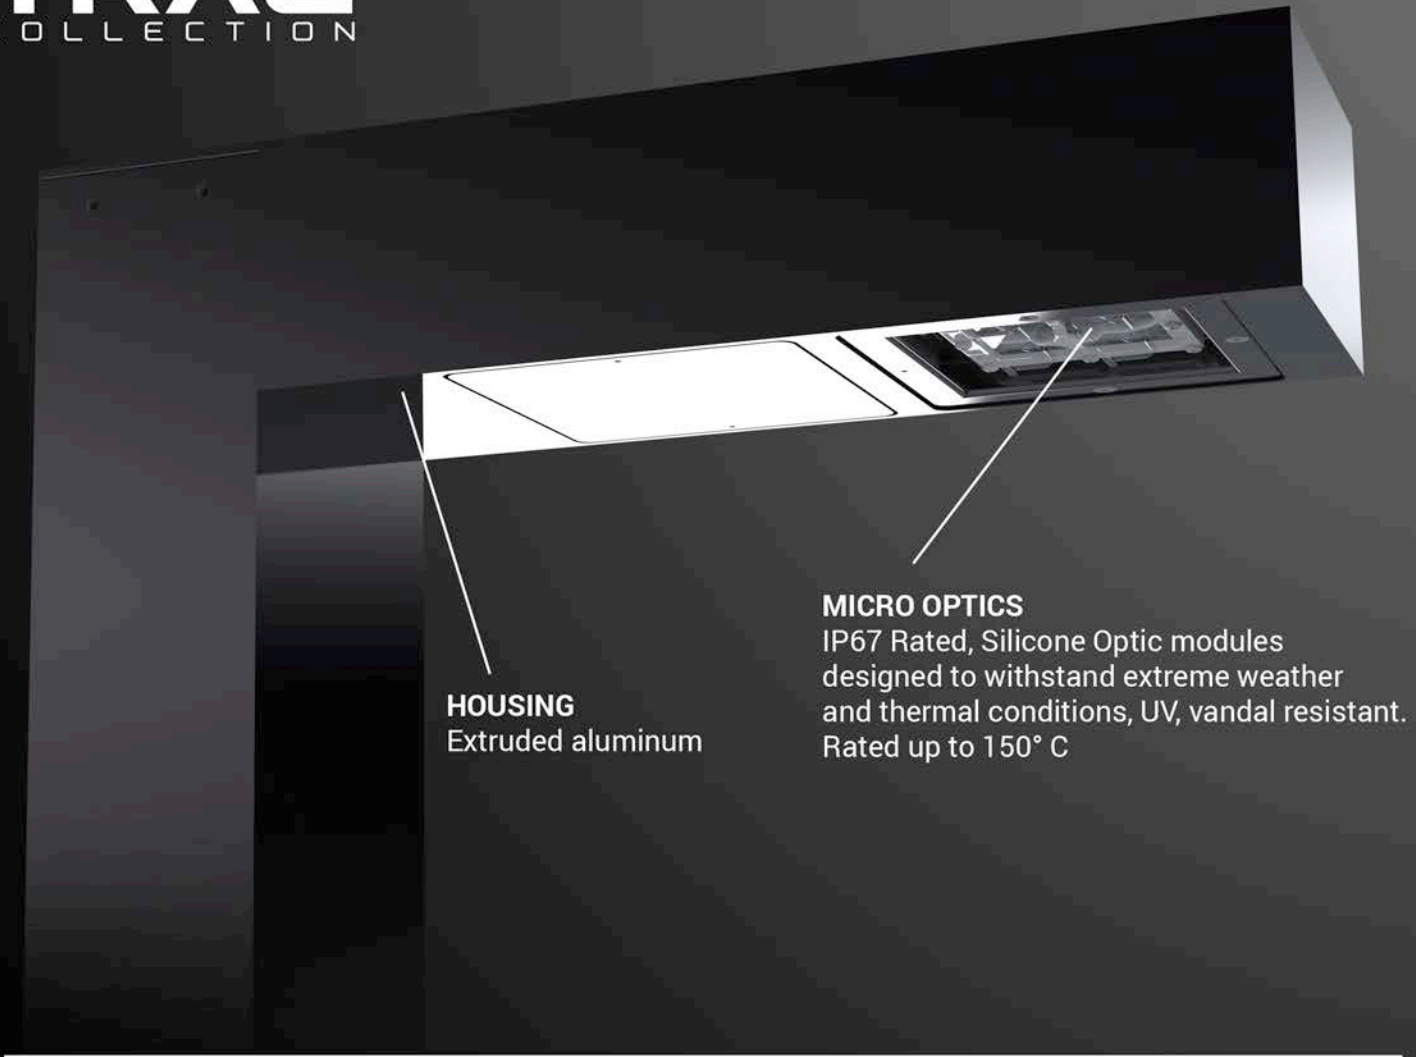

HOUSING
Extruded aluminum

MICRO OPTICS
IP67 Rated, Silicone Optic modules designed to withstand extreme weather and thermal conditions, UV, vandal resistant. Rated up to 150° C

SPECIFICATION FEATURES

- **Silicone Micro Optics** - Will not Yellow, Oxidize, become Brittle or Crack. IP67 Protective Light Engine Seal. Fifty Percent More Heat resistant to LED temperature than common PMMA Acrylic or Polycarbonate optics. Vandal Proof!
- **Lighting Solution** - The TRAC Collection has an L70 of 173,000 Hours. It utilizes the best electrical components available including 0-10V Dimming Driver(s), and a robust Thermal Management System
- Extruded, Fabricated, Powder Coated and Assembled in the U.S.A.



**TRAC BOLLARD (TBL)
RECTILINEAR BOLLARD**

TRAC
COLLECTION

FORM - FUNCTION - RELIABILITY

- Elegant Rectilinear Extruded Aluminum Housing
- Silicone Micro Optics
- IES Distributions T2, T3, T4
- L70 173,000 Hours
- 0-10V Dimming Drivers
- 2700, 3000, 3500, 4000, or 5000 Kelvin
- 700-6,400 Lumens, 10-56 Watts
- Advanced Thermal Management System
- 5 mils Electrostatic Powder Coat
- IP67 Light Engine



HOUSING
Extruded aluminum

MICRO OPTICS
IP67 Rated, Silicone Optic modules
designed to withstand extreme weather
and thermal conditions, UV, vandal resistant.
Rated up to 150° C

SPECIFICATION FEATURES

- **Silicone Micro Optics** - Will not Yellow, Oxidize, become Brittle or Crack. IP67 Protective Light Engine Seal. Fifty Percent More Heat resistant to LED temperature than common PMMA Acrylic or Polycarbonate optics. Vandal Proof!
- **Lighting Solution** - The TRAC Collection has an L70 of 173,000 Hours. It utilizes the best electrical components available including 0-10V Dimming Driver(s), and a robust Thermal Management System
- Extruded, Fabricated, Powder Coated and Assembled in the U.S.A.


NLS
LIGHTING

**TRAC BOLLARD (TBA)
ANGLED RECTILINEAR BOLLARD**

TRAC
COLLECTION

FORM - FUNCTION - RELIABILITY

- Elegant Rectilinear Extruded Aluminum Housing
- Silicone Micro Optics
- IES Distributions T2, T3, T4
- L70 173,000 Hours
- 0-10V Dimming Drivers
- 2700, 3000, 3500, 4000, or 5000 Kelvin
- 700-6,400 Lumens, 10-56 Watts
- Advanced Thermal Management System
- 5 mils Electrostatic Powder Coat
- IP67 Light Engine

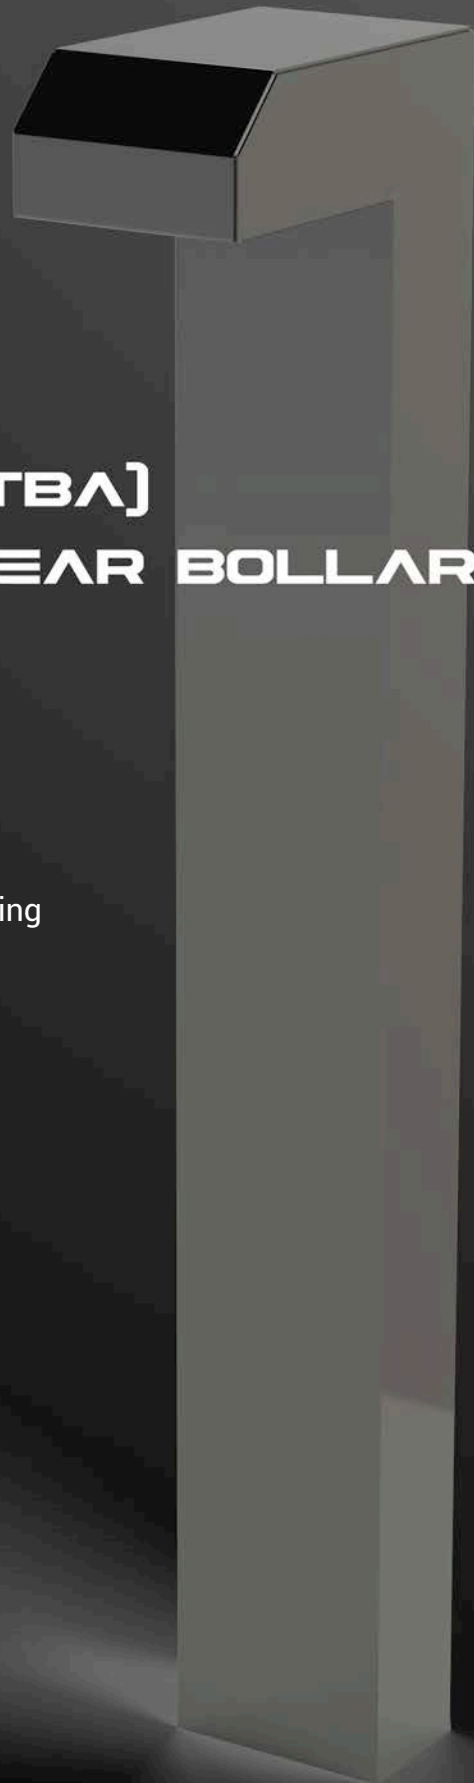


MICRO OPTICS

IP67 Rated, Silicone Optic modules designed to withstand extreme weather and thermal conditions, UV, vandal resistant. Rated up to 150° C

HOUSING


Extruded aluminum

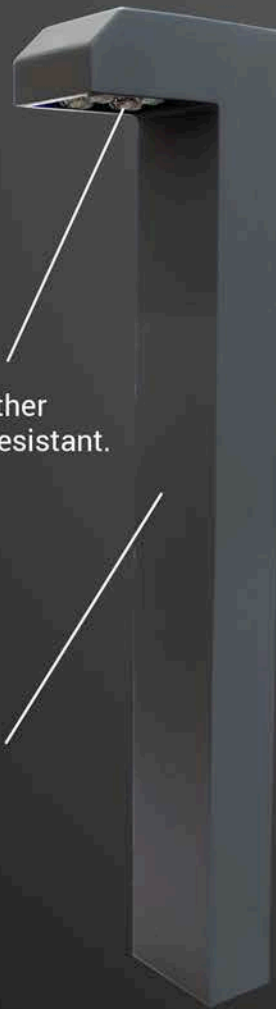

SPECIFICATION FEATURES

- **Silicone Micro Optics** - Will not Yellow, Oxidize, become Brittle or Crack. IP67 Protective Light Engine Seal. Fifty Percent More Heat resistant to LED temperature than common PMMA Acrylic or Polycarbonate optics. Vandal Proof!
- **Lighting Solution** - The TRAC Collection has an L70 of 173,000 Hours. It utilizes the best electrical components available including 0-10V Dimming Driver(s), and a robust Thermal Management System
- Extruded, Fabricated, Powder Coated and Assembled in the U.S.A.

NLS
LIGHTING

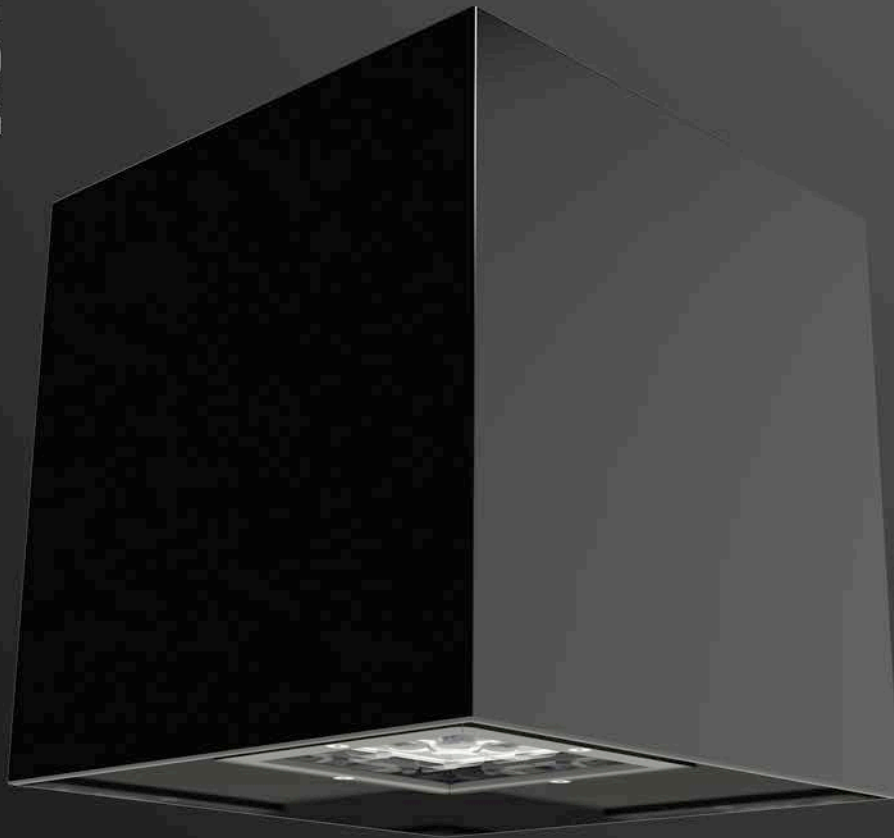

TRAC SCENCE (TWL)
RECTILINEAR SCENCE

TRAC
COLLECTION

FORM - FUNCTION - RELIABILITY

- Elegant Rectilinear Extruded Aluminum Housing
- Silicone Micro Optics
- IES Distributions T2, T3, T4
- L70 173,000 Hours
- 0-10V Dimming Drivers
- 2700, 3000, 3500, 4000, or 5000 Kelvin
- 700-6,400 Lumens, 10-56 Watts
- Advanced Thermal Management System
- 5 mils Electrostatic Powder Coat
- IP67 Light Engine





HOUSING
Formed aluminum

MICRO OPTICS
IP67 Rated, Silicone Optic modules designed to withstand extreme weather and thermal conditions, UV, vandal resistant. Rated up to 150° C

SPECIFICATION FEATURES

- **Silicone Micro Optics** - Will not Yellow, Oxidize, become Brittle or Crack. IP67 Protective Light Engine Seal. Fifty Percent More Heat resistant to LED temperature than common PMMA Acrylic or Polycarbonate optics. Vandal Proof!
- **Lighting Solution** - The TRAC Collection has an L70 of 173,000 Hours. It utilizes the best electrical components available including 0-10V Dimming Driver(s), and a robust Thermal Management System
- Extruded, Fabricated, Powder Coated and Assembled in the U.S.A.

NLS
LIGHTING



TRAC SCENCE (TWA)
ANGLED RECTILINEAR SCENCE

TRAC
COLLECTION

FORM - FUNCTION - RELIABILITY

- Elegant Rectilinear Extruded Aluminum Housing
- Silicone Micro Optics
- IES Distributions T2, T3, T4
- L70 173,000 Hours
- 0-10V Dimming Drivers
- 2700, 3000, 3500, 4000, or 5000 Kelvin
- 700-6,400 Lumens, 10-56 Watts
- Advanced Thermal Management System
- 5 mils Electrostatic Powder Coat
- IP67 Light Engine





SPECIFICATION FEATURES

- **Silicone Micro Optics** - Will not Yellow, Oxidize, become Brittle or Crack. IP67 Protective Light Engine Seal. Fifty Percent More Heat resistant to LED temperature than common PMMA Acrylic or Polycarbonate optics. Vandal Proof!
- **Lighting Solution** - The TRAC Collection has an L70 of 173,000 Hours. It utilizes the best electrical components available including 0-10V Dimming Driver(s), and a robust Thermal Management System
- Extruded, Fabricated, Powder Coated and Assembled in the U.S.A.